



Elevation

Common to center opening door lifts and side opening telescopic door lifts.

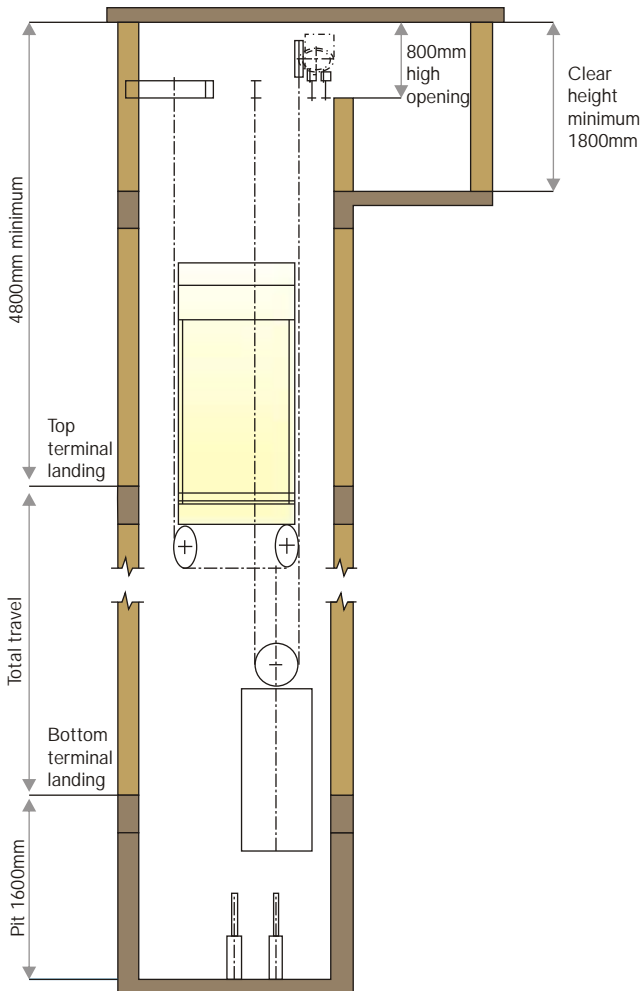

Plan of liftwell and Kranti's machine room for side opening telescopic door lift.

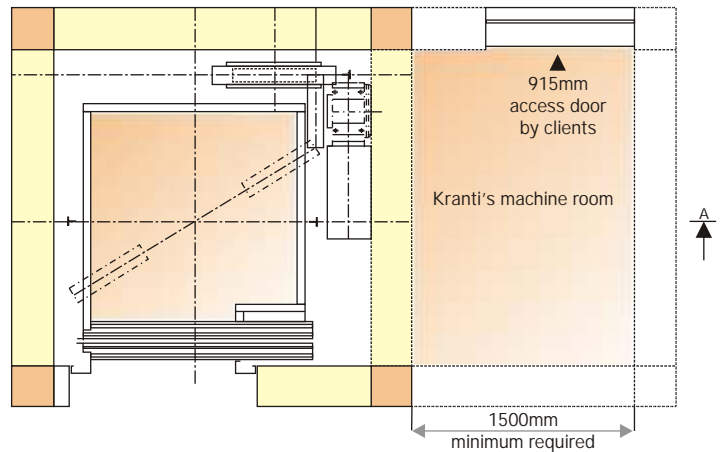

Note:

1. Kranti's machine room shown in the plan is indicative. It can be situated on any side of the liftwell except the entrance side.
2. Liftwell dimensions should be as per IS 14665(Part 1):2000. For specific requirements our local representative will be happy to work with you in preparation of working drawings.
3. All dimensions are in millimeters.
4. All dimensions are for clear finished lift wells after plastering.
5. Clear entrance heights of door openings at 2000 mm.
6. All walls minimum 150 RCC or 230 Brick (hoist way front wall 230 brick preferred).
7. Power supply 400 Volts, 3 phase, 4 wires, 50 hz and 230 Volts 1 phase terminating in a TPIC / DPIC switch to be provided by clients.

Plan of liftwell and Kranti's machine room for center opening door lift.

